




Asva

Pre-cleansing machines

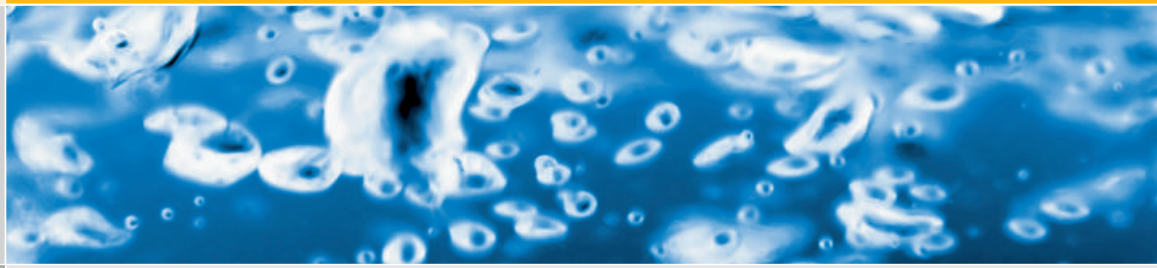

Compact and powerful
by an innovative nozzle layout.



The compact pre-cleansing units ASVA 60 and ASVA 120 are excellently suited to pre-cleansing your asparagus.

The asparagus spears are cleansed from **above** and from **below** in only one run - a time and cost saving way.



Neubauer
Automation

ASVA 60 and ASVA 120

The ASVA is available in three variant types and sizes. The compact, motor-driven ASVA 60 [optionally without motor] is an inexpensive alternative for small enterprises. The ASVA 120 with its two powerful pumps at 60 m³/h and powered by an electric motor is the optimal solution for pre-cleansing very large amounts of asparagus spears at highest speed.

Specifications.

ASVA 60

- Stainless steel body [1.4301]
- 60 m³/h water throughput
- Cleansing of spears by a bank of nozzles Ø 20 mm from **above** and from **below**
- Transport of containers within the cleansing section by V-belt drive
- Feed through vario-drive adjustable from 0.4 to 2.4 m/h [optionally without drive]
- As a standard, input and output of asparagus containers via downward slope of roller conveyors [4 m supplied as standard]
- Plastic rollers blue [Ø 50 mm] with stainless steel bearings
- Roller distance 100 mm
- Width of roller conveyor 520 mm with side guides for containers
- Height-adjustable with equalizing feet for uneven floors.

ASVA 120

- Stainless steel body [1.4301]
- 120 m³/h water throughput with 2 waste water pumps 60 m³/h each
- Large water tank for cleansing water and sediments
- Easy draining and cleaning
- Cleansing of asparagus spears by 2 banks of nozzles each [Ø 20 mm] from **above** and from **below**
- Transport of containers within the cleansing section by V-belt drive
- Feed through vario-drive adjustable from 0.4 to 2.4 m/h
- As a standard, input and output of asparagus containers via downward slope of roller conveyors [4 m supplied as standard]
- Plastic rollers blue [Ø 50 mm] with stainless steel bearings
- Roller distance 100 mm
- Width of roller conveyor 520 mm with side guides for containers
- Height-adjustable with equalizing feet for uneven floors.

The roller conveyors can be extended infinitely or be expanded by elbow units from our range of roller conveyors.

Please contact us. We can design the work flow for you.




Cleansing through nozzles from **above** and from **below**.



Infinitely variable speed



Asva 60

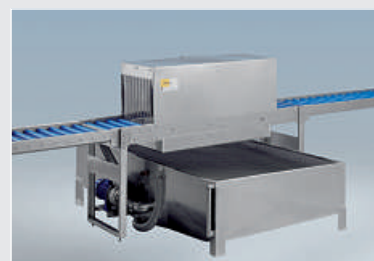

Asva 120